

## C7 Ultra-Fast Charger Up to 400kW



### Product Overview

C7 is a barrier free, configurable, double outlet DC charger, which is suitable for easy-access public parking environment. It consists of HMI touch screen, power module, charger control unit, HPC DC charging cable. With compliance of OCPP 1.6J, C7 is able to be configured/diagnosed remotely through internet connection via 4G/LTE/Ethernet.

### Product Features



#### Barrier-free Design:

- The connector and HMI design of C7 complies with accessible regulation (DIN 18040-3).
- The barrier-free design makes it user-friendly and easily accessible to everyone, including wheelchair users.



#### Integrated Cable Management:

The integrated cable management system ensures that various types of vehicles can be reached easily and flexibly, keeping the carpark safe and neat.



#### Easy Installation and Maintenance:

- With a compact size of 800x900x1992mm, it is flexible to install C7 in a variety of charging locations.
- Native support to OCPP and secure OTA updates ensure easy maintenance and resilience of the charging system.



#### High Power Output:

- C7 is capable of delivering up to 400 kW power at max 600A, shortening charging time significantly.
- Adapted to various businesses, the mechanically compatible design provides reliable high-power DC charging experience at 200-1000V.



#### Modern and Powerful Presence:

- C7 has not only an HMI display with simple and intuitive user interface, but also a large 1080P screen for additional advertising.
- Equipped with robust housing and moving LED lights, it looks modern and distinctive.




#### Customizable Branding:

- Easy branding and color customization helps your brand stand out.
- Innovative LED lighting indicates availability of charger and the state-of-charge.
- Your brand visibility can be boosted with customized LED color and branding.

# System Overview

---

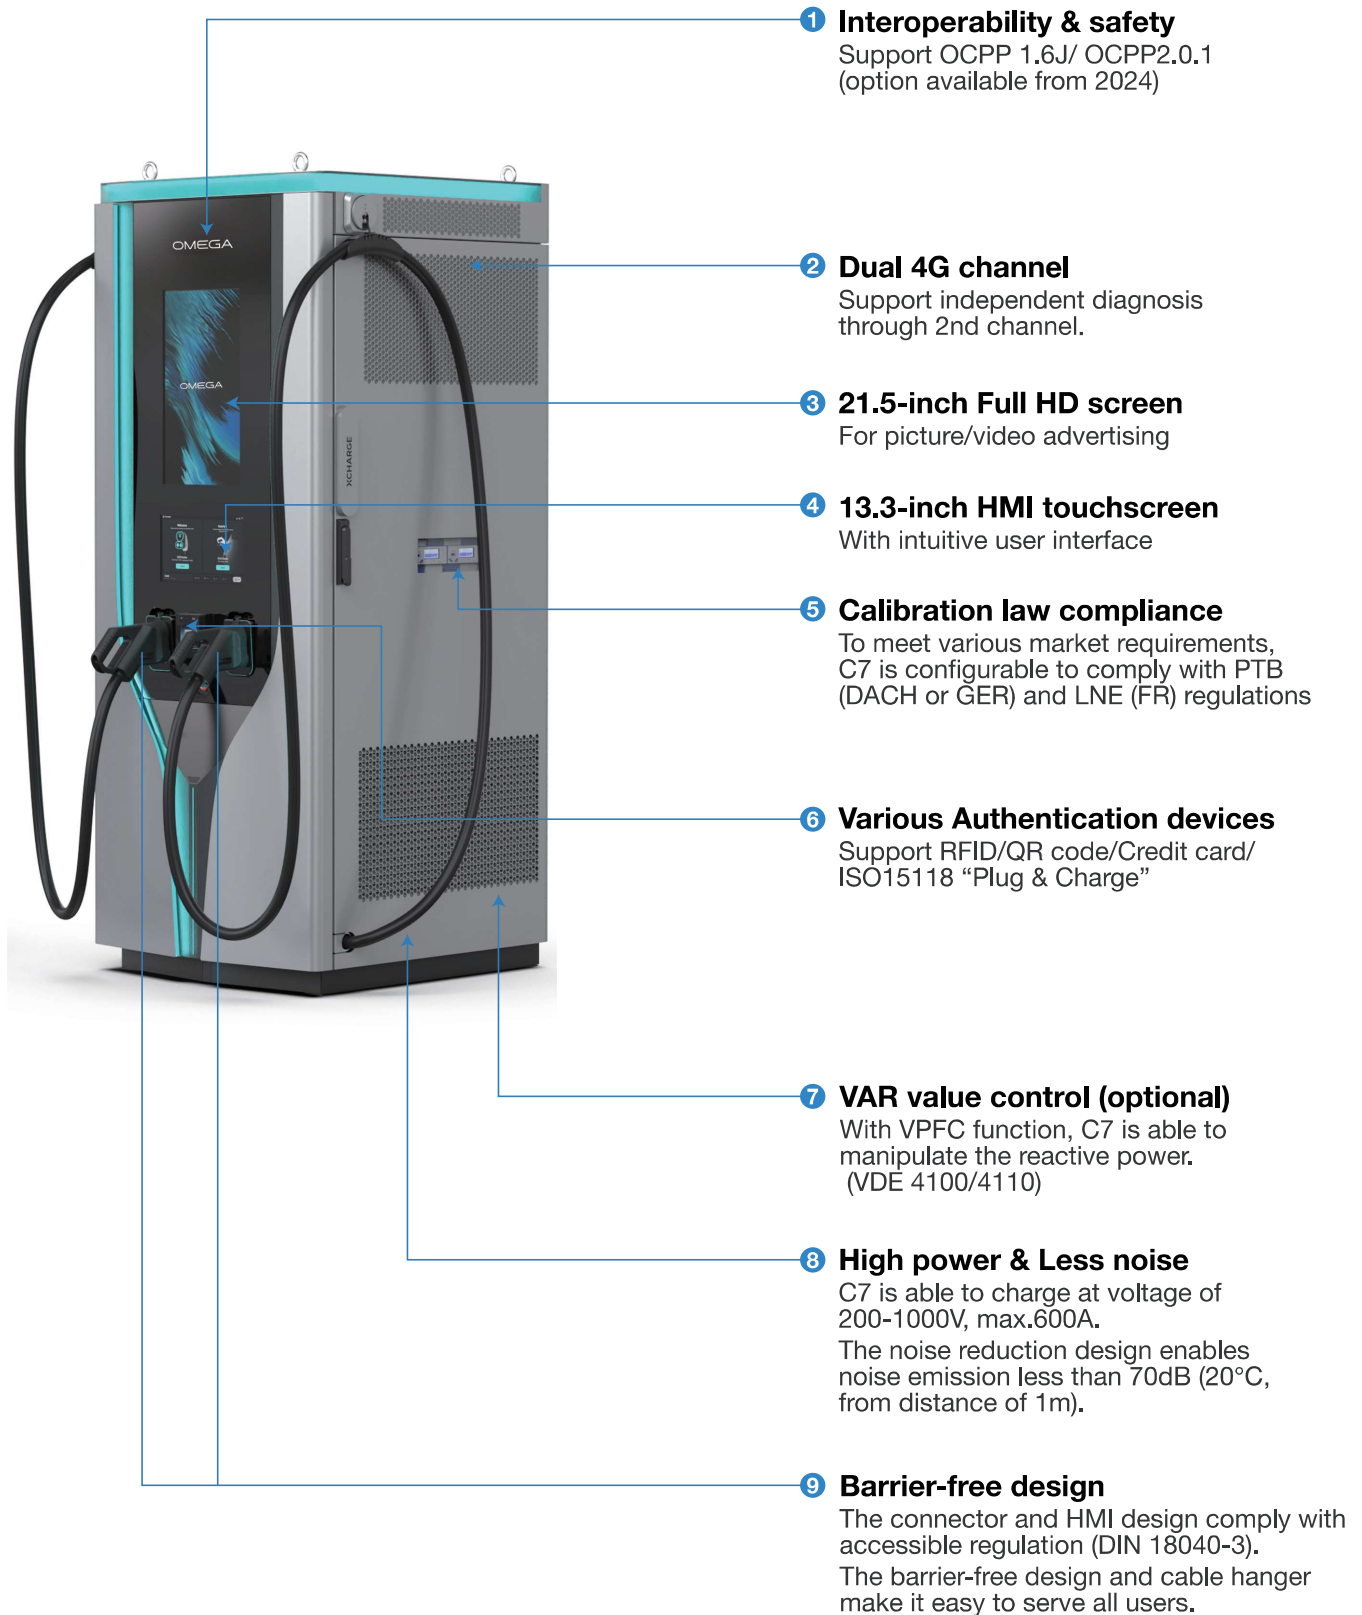

**1 Interoperability & safety**  
Support OCPP 1.6J/ OCPP2.0.1  
(option available from 2024)

**2 Dual 4G channel**  
Support independent diagnosis  
through 2nd channel.

**3 21.5-inch Full HD screen**  
For picture/video advertising

**4 13.3-inch HMI touchscreen**  
With intuitive user interface

**5 Calibration law compliance**  
To meet various market requirements,  
C7 is configurable to comply with PTB  
(DACH or GER) and LNE (FR) regulations

**6 Various Authentication devices**  
Support RFID/QR code/Credit card/  
ISO15118 “Plug & Charge”

**7 VAR value control (optional)**  
With VPFC function, C7 is able to  
manipulate the reactive power.  
(VDE 4100/4110)

**8 High power & Less noise**  
C7 is able to charge at voltage of  
200-1000V, max.600A.  
The noise reduction design enables  
noise emission less than 70dB (20°C,  
from distance of 1m).



**9 Barrier-free design**  
The connector and HMI design comply with  
accessible regulation (DIN 18040-3).  
The barrier-free design and cable hanger  
make it easy to serve all users.

# Technical Specification

Product Model		C7 Ultra-Fast Charger		
General Features	Maximum Power Output	400kW		
	Authorization	RFID/QR code/Credit card/ISO15118 'Plug & Charge'		
	Dimensions	800x900x1992mm		
	Weight	Approx. 680kg		
	Housing Material	Industrial alloy with weatherproof coating		
	Installation	On ground, Indoor/ Outdoor		
	HMI & Plug Operation Height	85-105cm		
	Operation Temperature	-35°C — 50°C		
	Noise	< 70dB at distance of 1m (steerable via preset silence mode sent by backend )		
	Humidity	≤ 95% No condensing		
	Altitude	≤ 2000m		
	Electrical Features	RFID/NFC	ISO/IEC 14443A/B, 14443-4A/B, M1(S50/70) card	
Network Adapter		Cellular(3G/4G/LTE), Ethernet RJ-45		
HMI		13.3 inch 1920x1080 LCD Touch Screen		
Advertisement		21.5 inch 1920x1080 LCD Screen		
External Control System		Modbus TCP Client supported		
OCPP Protocol		OCPP 1.6J/ OCPP2.0.1 (option available from 2024)		
THD		< 5% (steerable via central control on site)		
Power Efficiency		≥ 94%		
Metering		DC Meter (with PTB or LNE compliance) AC Meter (for input measurement)		
VAR Value Control		+0.9(inductive) ~ -0.9(capacitive) (optional)		
Input & Output		Input Voltage	3P+N 400V ±15%	
	Frequency	50Hz/60Hz		
	Connectors	CCS2 (Liquid cooled cable)	CCS2 (Air cooled cable)	
	Max. Output Power	240kW@400V	200kW@400V	
		360kW@600V	300kW@600V	
		400kW@700V	400kW@800V	
	Max. Output Current Peak Value	600A	500A	
	Max. Output Current Continuously	500A	250A	
	Output Voltage Range	200-1000V	200-1000V	
	Power Allocation	120-40-40-40-40-120kW (40kW step, 400kW in total)		
Cable Length	5.5m			
Cable Cooling	Liquid cooling			
Safety Security	Compliance	IEC 61851-1:2011, IEC 61851-23:2014, IEC 61851-24:2014, IEC 62196-3:2014, DIN 18040-3, ISO 15118, DIN 70121-2014		
	Safety Protection	Over/Under voltage, Short circuit, Reverse connection, Grounding, Door switch, Smoke/Water ingress, Tilting.		
	Ingress Protection	IP54		
	Impact Resistance	IK10		
	Cyber Security	TLS 1.3		


# Mechanical Dimensions

Unit: mm

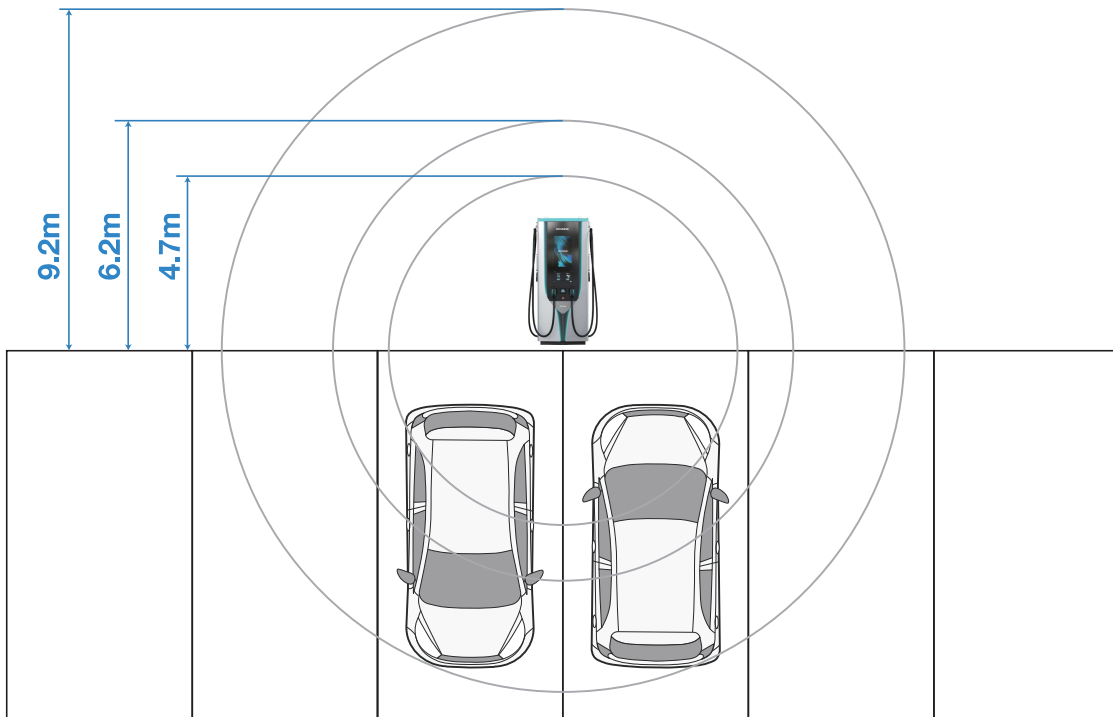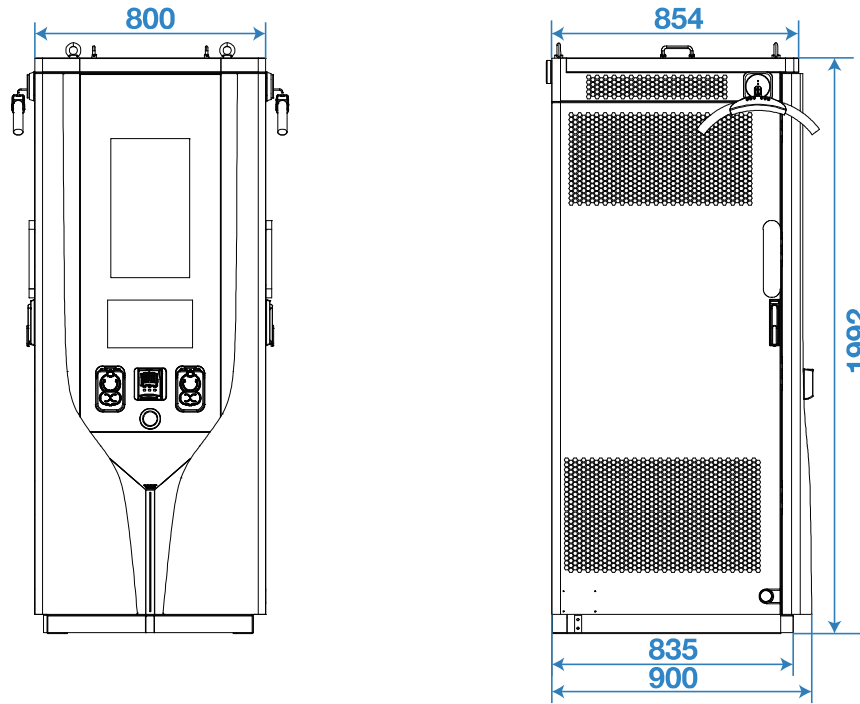

# Output Power Curve

---

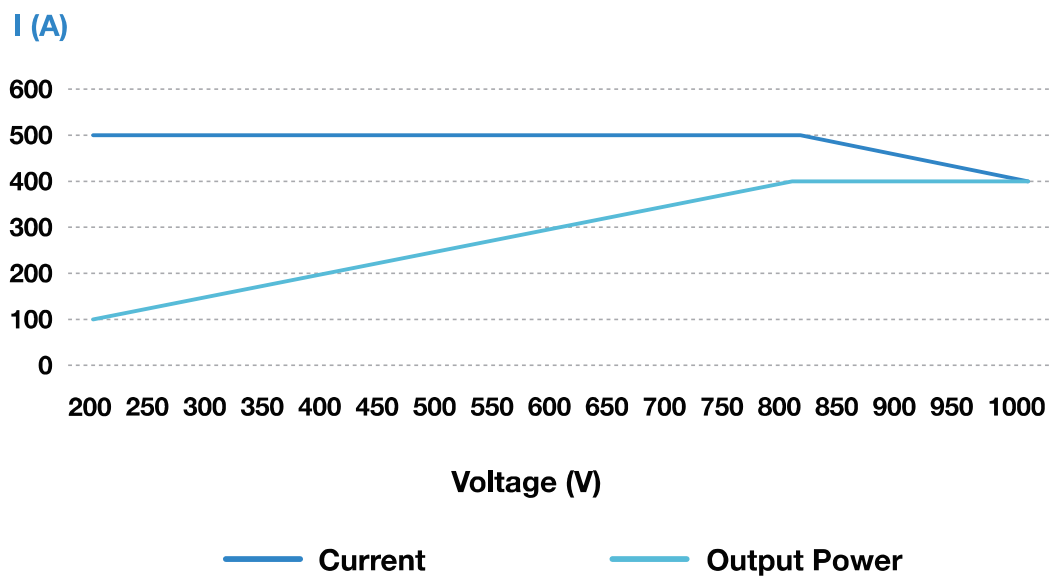

---

## OMEGA EVC

Omega Tech Inc.  
Address: 453 S. Spring St – Ste 400  
Los Angeles, CA 90013  
Cell (909) 718 – 9699  
[www.OmegaEVC.com](http://www.OmegaEVC.com)  
[Sales@Omegaevc.com](mailto:Sales@Omegaevc.com)